


ELYCTIS

e-ID expert

ID READER - OEM series *High speed dual reader*

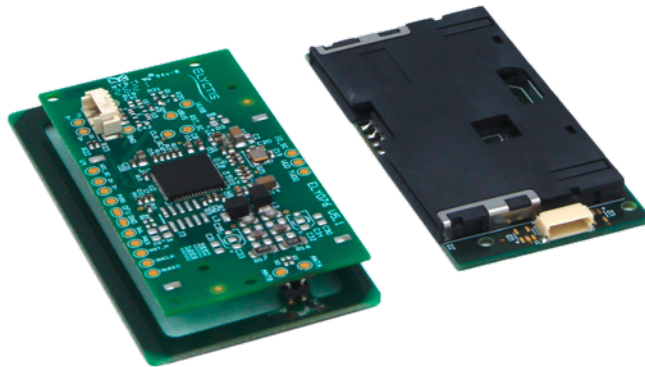

- USB and HSU connection
- Dual interface
- Integrated or remote contact SC
- CCID protocol
- Fast reading
- Optimized for eID
- Low power

www.elyctis.com

ID READER - OEM series

Features

General

- Dimensions 72,8 x 37,7 x 5,6 mm
- Temperature In operation: -20°C to +50°C
Storage: -40°C to +80°C
- Communication Hi-speed UART (1.288Mbit/s)
USB 2.0 full speed (12 Mbps)
- Host operating systems Any Embedded hosts
- Standby mode 320uA (Low Power Card Detection – LPCD)
- Polling mode 30mA (Waiting for a card)
- Communication mode 250mA max (Card in field)

Contactless reader



- Supported protocols ISO 14443 Part 1 to 4, type A/B – T=CL and Mifare
All Mifare products: Ultralight, 1K, 4K, Plus, DESFire EV1, Smart MX, ...
- NFC support Card Reader/Writer mode
- Speed Baudrate up to 848 kbps
- Communication Custom CCID library (Android)
CCID compliant (Windows, MacOS, Linux)
PC/SC 2.01 compliant (Windows, MacOS, Linux)
- Firmware Support for RF configuration
Pass-through command to reach protocol lower layer
Field upgradable

Contact card reader

- Supported protocols ISO 7816 – T=0 and T=1
5V, 3V, 1.8V, ISO 7816 Class A/B/C
- Speed Baudrate up to 230 kbps
Clock: Up to 10 Mhz
- Communication Custom CCID library (Android)
CCID compliant (Windows, MacOS, Linux)
PC/SC 2.01 compliant (Windows, MacOS, Linux)

Product Range

	ID READER 012 USB	ID READER 021 USB	ID READER 012 HSU	ID READER 021 HSU
Contactless reader	✓	✓	✓	✓
Contact reader		✓		✓

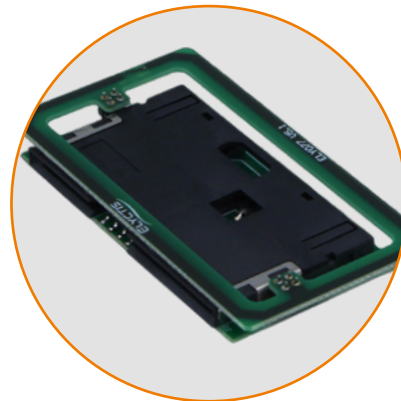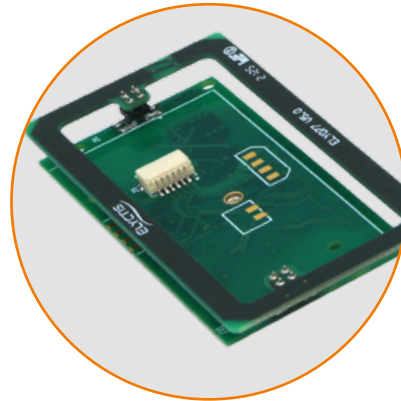

ELYCTIS sas

91 rue Benjamin Franklin – 84120 Pertuis – FRANCE
Tel. +33 6 27 71 37 68
contact@elyctis.com - www.elyctis.com
Siret 508 994 449 00033 – VAT number FR47 508 994 449

ELYCTIS HK Limited

D2 2/F Mai Wah Ind. Bldg. – 1-7 Wah Sing St. Kwai Chung
NT – HONG KONG
Tel. +852 91 08 78 58
contact_hongkong@elyctis.com